


- Easily interfaces to LIS/HIS
- High correlation to Westergren method



HOW miniiSED™ WORKS

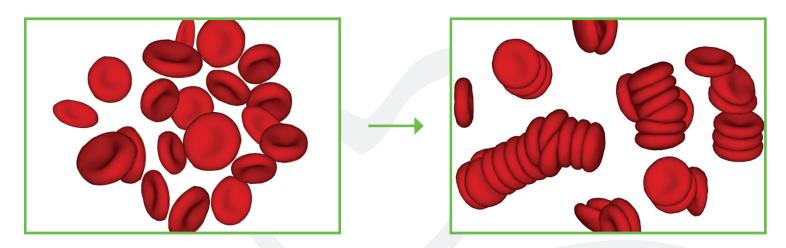

The miniiSED™ utilizes photometric readings to quantify the Rouleaux formation, which is the earliest and most critical phase of sedimentation.

Results are obtained less than 15 seconds!

The miniiSED™ technology makes it possible to eliminate variables commonly associated with traditional ESR methodologies, such as hematocrit, MCV and temperature.

IDEAL FOR EMERGENCY ROOMS, POL, AND IDEAL AS A BACKUP ANALYZER IN THE TYPICAL HOSPITAL LABORATORY.

SPECIFICATIONS

Principle of measure ———	Photometrical rheoscope
Analytical range —	1-130mm/hr
Sample requirements ——	100μL whole blood (500μL dead volume
Tube requirements ———	13 x 75mm test tube in
rube requirements	EDTA anti-coagulant, capped
Barcode reader ————	Internal
Interface ————	Serial RS232 port for LIS connection
Power requirements ———	100-240VAC; 50-60Hz; 60W
Quality control	Human-based quality control
Dimensions —	24 x 18 x 26 cm (9.5 x 7.1 x 10.4 in)

EVERYTHING YOU NEED TO GET STARTED

miniiSED™ Automated ESR Analyzer
Test Card of various denominations
Seditrol® Quality Control Kit

